



ROTECH FOR RELIABILITY!

Why Accept Anything Less?

BRAD® CONNECTIVITY


HEAVY DUTY – END OF SHAFT

AE 2000-RS Series Aluminium Body


The AE 2000-RS series of Rotech shaft mounted motion sensors & encoders are manufactured in an extremely tough and durable aluminium casting with an industrial powder coated finish as well as being fitted with the Brad® Quick connectivity range of 3 & 4 pin receptacles for easy on site electrical termination.

Installation is simple and easy, just one 12mm threaded hole in the end of the shaft being monitored or fitted using the unique “Mag-Con” magnetic connector as shown below.

A wide range of number of pulses per revolution are available together with AC and DC electrical outputs. Quick connectivity using the standard Brad® Mini – Change® Connectors as shown below.

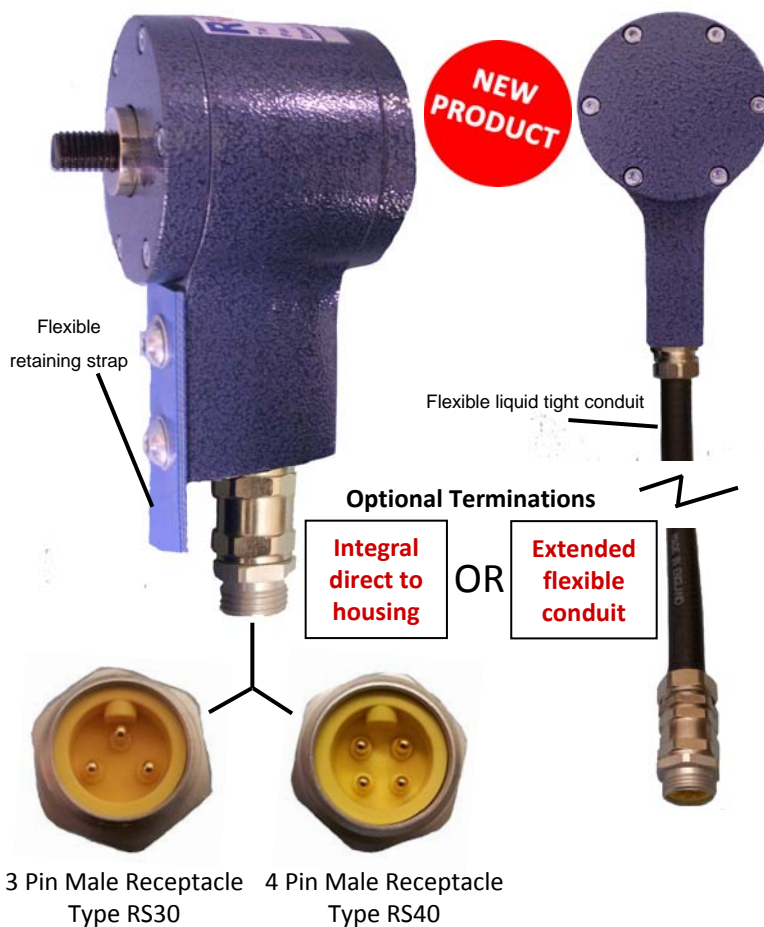

APPLICATION EXAMPLE:

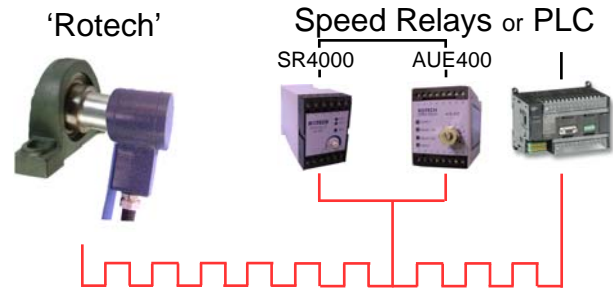

FOR MONITORING:

- Speed
- Distance
- Direction
- Belt slip
- Shaft stopped
- Underspeed
- Overspeed
- Safety guards interlocking

FEATURES:

- Totally self contained (no guards required)
- Maintenance free for maximum reliability
- 1 to 1000 pulses per revolution
- Environment ingress-IP67
- -25 to +70, 100, 125, 150 deg Celsius versions available




MAG-CON

MAGNETIC SHAFT CONNECTOR


For Quick and Easy Installation of Rotech Shaft Mounted Sensors & Encoders.

Simply attaches to existing shafts

IMPORTANT NOTE:
MAXIMUM OPERATING SPEED IS 300RPM
RECOMMENDED MINIMUM
SHAFT DIAMETER FOR FITTING=35MM

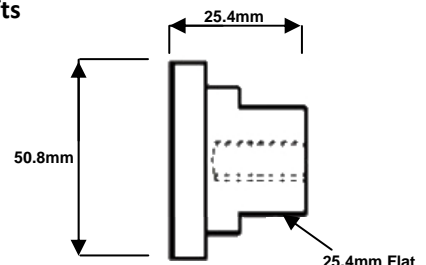

Dimensions/Installation/Electrical Terminations

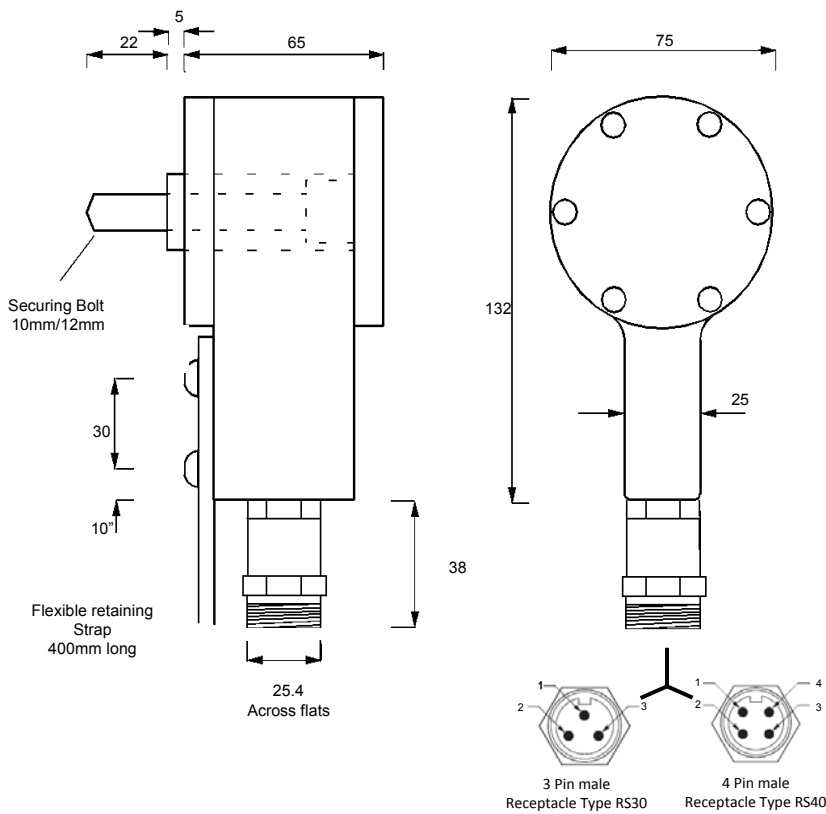

Dimensions shown in Millimetres

RS30/RS40 Connection options available

Female Chassis/Conduit Plug




Female Cable Plug




Cable Plug Views

3 Pin Female Connector Type RS30



4 Pin Female Connector Type RS40



Refer to electrical outputs below for pins designation

Cable Cores Identification

- RS30**
1. Black
 2. Brown
 3. Blue

- RS40**
1. Black
 2. Blue
 3. Brown
 4. White


Available Pulse Rates (PPR)

1,2,4,5,6,8,10,12,16,20,30,32,40,50,60,100,120,180,240,250,300,360,500,1000 (Dependent Upon Output Type)

Electrical Outputs

Type Z (2 Wire Non Polarized) 10-30Vdc


RS30



Max frequency = 1500Hz

Type E (N.P.N) 10-30Vdc Current sink


RS40



Max frequency = 600Hz

Type E2 (P.N.P) 10-30Vdc Current source

RS40




Max frequency = 600Hz

Type E3 (N.P.N + P.N.P - 3 wire) 10-30Vdc

RS40


Bi-polar - Current sink/source



Max frequency = 1000Hz

Type E4 (N.P.N + P.N.P. - 2 Wire) 10-30Vdc


RS30

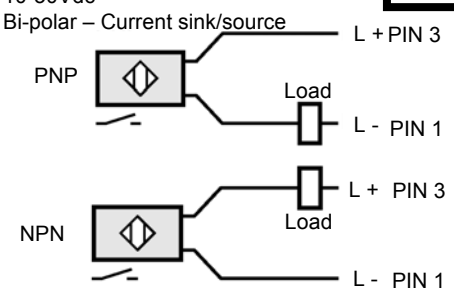

Max frequency = 1300Hz

Type W 20-240V AC/DC 50/60Hz (1 to 30 PPR only)

RS30

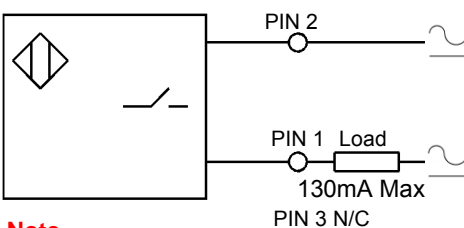


Note Minimum operating current = 5mA

Max frequency = 25Hz (AC) 1000Hz (DC)

Type N (Namur) 8-2 Vdc (1KΩ) Intrinsically safe circuits

RS30

The voltage and current characteristics of NAMUR sensor outputs are so low that they can be safely used in explosive environments. The power limitation is implemented in the corresponding equipment. This means that the circuit containing a NAMUR proximity sensor is only intrinsically safe if it is supplied via a corresponding isolating amplifier. Contact Rotech Systems for details of amplifiers available.

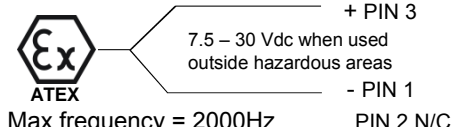

Max frequency = 2000Hz



Tel : +44 (0)151 356 2322 Website: www.rotechsystems.co.uk
 Fax: +44 (0)151 356 2437 Email: sales@rotechsystems.co.uk

